
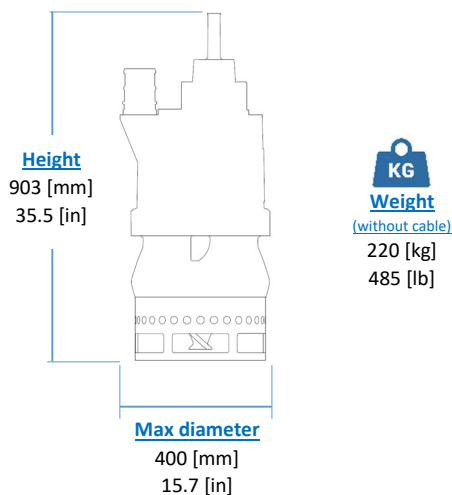
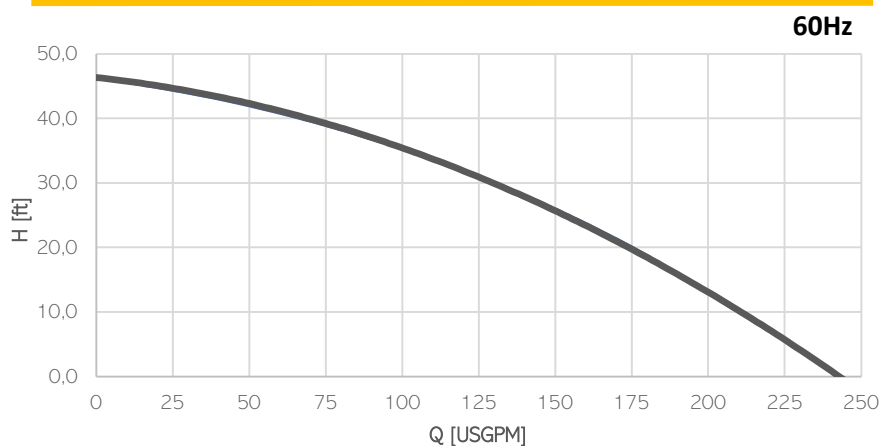


ELECTRIC PUMP

EL5

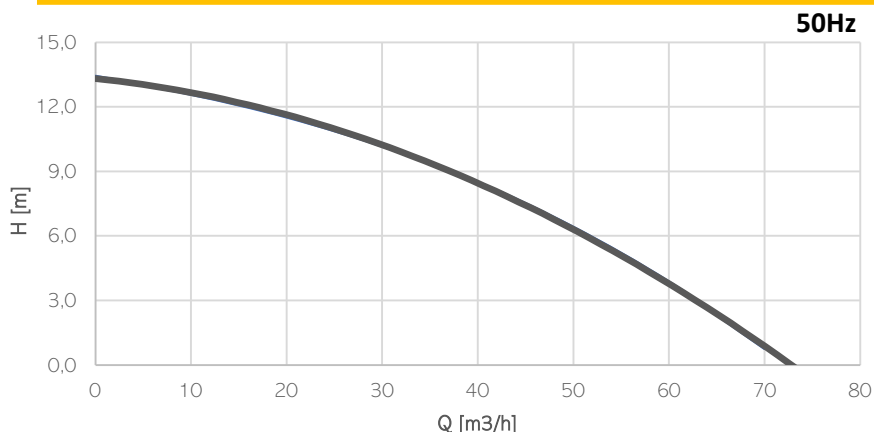

Electrical motor

| Insulation class H

Cable

| 1 x H07RN-F 4G10 length 20m

Operating Conditions

| Max liquid temperature 35°C
| Min Submersion depth 350mm

Model	EL5	
Brake Power [kW HP]	3.7 5	
Electric Power [kW HP]	4.5 6	
Frequency [Hz]	50	60
Efficiency [%]	22%	21%
Number of Poles	4	4
RPM	1450	1740
Voltage [V]	400	460
Rated Current [A]	8,7	7.5
Solid handling [mm in]	20 0.8	
Discharge (Hose adaptor) [mm in]	80 3"	

Materials

Part	Standard
Casing	Cast Iron EN-GJS500
Body	Cast Iron EN-GJS500
Wear Parts	High chrome EN-GJN-HV600 (CH6)
Minimum hardness [HB]	550
Main shaft	High tensile 39NiCrMo3
PH Range	5-10

Seals and lubricants

Version	STANDARD
Motor Side	MECHANICAL
Impeller Side	MECHANICAL
Oil type	ISO32