

HYDRAULIC EXCAVATOR

EXHY20



EXCAVATOR SPECIFICATIONS

Torque [KNm]	2.6
Blades	3
N° Teeth	6
Weight [kg]	500



HYDRAULIC MOTOR

Type	Stellar
Motor displacement [cc]	700
Max. oil flow rate [l/min]	35
Max. pressure [bar]	250
Power [kW HP]	14.5-19.8
Speed [RPM]	50




SEALS AND LUBRICANTS

Seals	LIPS
Oil Type	EP320



PORTS

Service line Ports:	SAE 3000 1 1/4in
Case drain Port	1/2in BSP

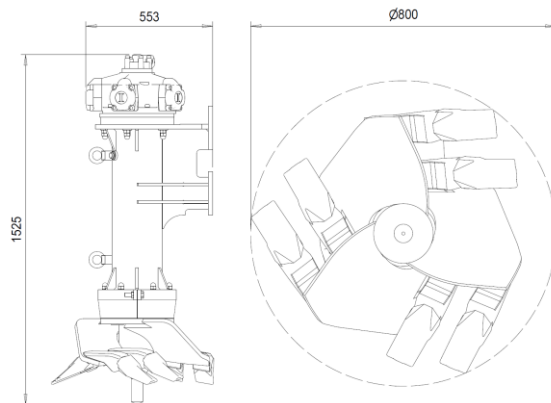


Multipurpose (default)



High capacity/soft materials (/S)



Hard materials (H)

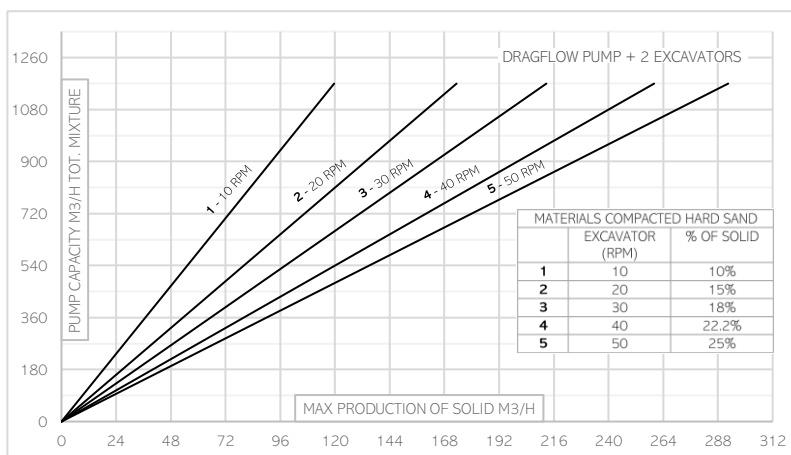

HYDRAULIC EXCAVATOR

EXHY20S



EXCAVATOR SPECIFICATIONS

Torque [KNm]	4.5
Blades	3
N° Teeth	6
Weight [kg]	550



HYDRAULIC MOTOR

Type	Stellar
Motor displacement [cc]	1183
Max. oil flow rate [l/min]	60
Max. pressure [bar]	250
Power [kW HP]	25-34
Speed [RPM]	50




SEALS AND LUBRICANTS

Seals	LIPS
Oil Type	EP320



PORTS

Service line Ports:	SAE 3000 1 1/2in
Case drain Port	1/2in BSP

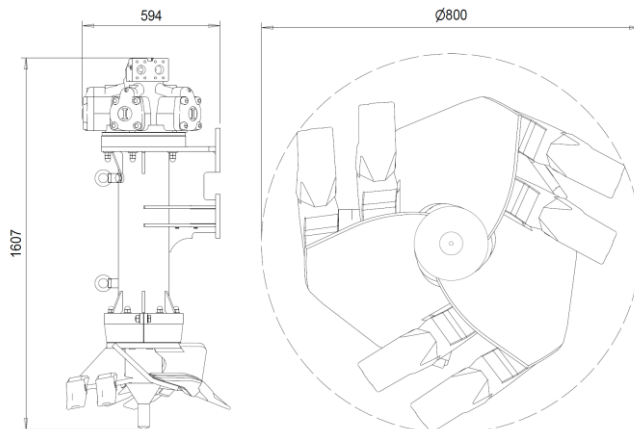


Multipurpose (default)



High capacity/soft materials (/S)



Hard materials (H)

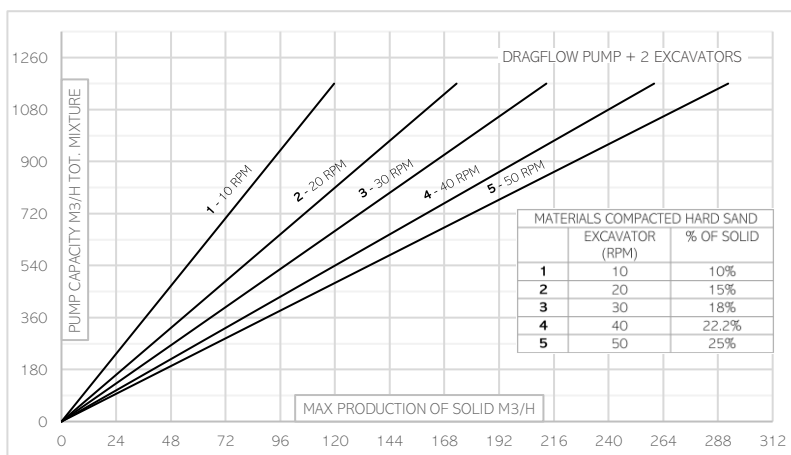

HYDRAULIC EXCAVATOR

EXHY35



EXCAVATOR SPECIFICATIONS

Torque [KNm]	4.5
Blades	3
N° Teeth	9
Weight [kg]	600



HYDRAULIC MOTOR

Type	Stellar
Motor displacement [cc]	1183
Max. oil flow rate [l/min]	60
Max. pressure [bar]	250
Power [kW HP]	25-34
Speed [RPM]	50




SEALS AND LUBRICANTS

Seals	LIPS
Oil Type	EP320



PORTS

Service line Ports:	SAE 3000 1 1/2in
Case drain Port	1/2in BSP

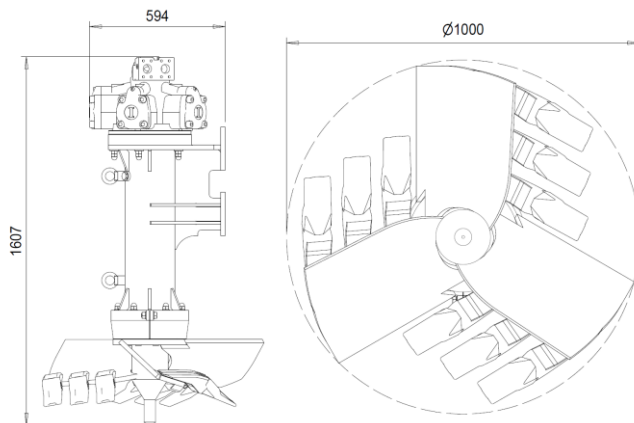

Multipurpose (default)



High capacity/soft materials (/S)



Hard materials (H)

